

Monocrystalline 132 cells

TRITON




M6 166
9BB



Guaranteed positive output
selection 0 ~ +5 Wp
by single measuring



3.2 mm anti-reflective glass



BLACK | WHITE




Maximum stability through
aluminium soft grip frame



Maximum 5400 Pa snow load



15 years manufacturer's warranty
25 years linear performance guarantee

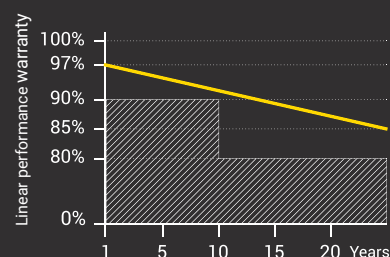

OUTPUT: 395 - 400 WATT

TRITON monocrystalline 132 halfcut cell series with multibusbar M6 cells is the newest top efficiency series. Halfcut cells are split in two halves to improve the performance and they are arranged in two parallel strings for a better management of shading. Featuring a 35 mm black anodized aluminium frame, TRITON series can combine visual attractiveness to conversion efficiency over 20 %.



power for a better world

STC	A-HCM395/132	A-HCM400/132
Maximum Power (Pmax) (W)	395	400
Open Circuit Voltage (Voc) (V)	43.92	44.09
Short Circuit Current (Isc) (A)	11.63	11.72
Voltage at Maximum Power (Vmpp) (V)	36.18	36.25
Current at Maximum Power (Impp) (A)	10.92	11.04
Module Efficiency (%)	20.69	20.95

STC (Standard Testing Condition): Irradiance 1000 W/m², Cell Temperature 25 °C, Spectra at AM 1.5; Test uncertainty tolerance for Pmax, Voc and Isc: ±3 %

Electrical Parameters at NOCT	A-HCM395/132	A-HCM400/132
Maximum Power (Pmax) (W)	295	298
Open Circuit Voltage (Voc) (V)	41.45	41.61
Short Circuit Current (Isc) (A)	9.39	9.48
Voltage at Maximum Power (Vmpp) (V)	33.51	33.63
Current at Maximum Power (Impp) (A)	8.79	8.86


NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², Ambient Temperature 20 °C, Spectra at AM 1.5, Wind at 1 m/s

Temperature Characteristics	
Pmax Temperature Coefficients (W / °C)	-0.37 % / °C
Voc Temperature Coefficients (V / °C)	-0.28 % / °C
Isc Temperature Coefficients (A / °C)	+0.05 % / °C
NMOT Nominal Operating Cell Temperature (°C)	45 ±2 °C

Operating Conditions	
Operating Module Temperature	-40 °C ~ +85 °C
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	20 A
Selection	0 ~ +5 W
Nominal Front Load	5400 Pa
Nominal Rear Load	2400 Pa
Class of Protection	II

Specifications	
Cell Type	Mono M6 166 9BB
Weight	21 kg ±3 %
Dimensions	1855x1029x35 mm (±2 mm)
Cable Cross Section Size	4 mm ² , cable approx 110 cm, QC4 compatible
No. of cells	132 (6x22)
Junction Box	IP67, 3 diodes
Frame	Black anodized aluminium
Front glass	3.2 mm high transmission, low iron, tempered glass

Packing Details	
Container Type	40'HC
No. of Pallets	24
Pieces per Pallet	30
Total quantity of modules	720

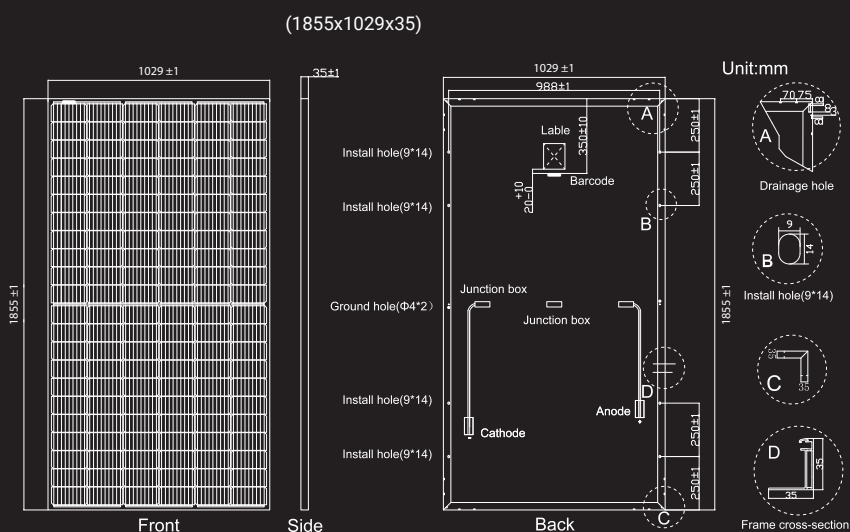

I-V Curve: (A-HCM395)

