


54QL6-DV

530-550 Watt

MONO-FACIAL MODULE
WITH DUAL GLASS

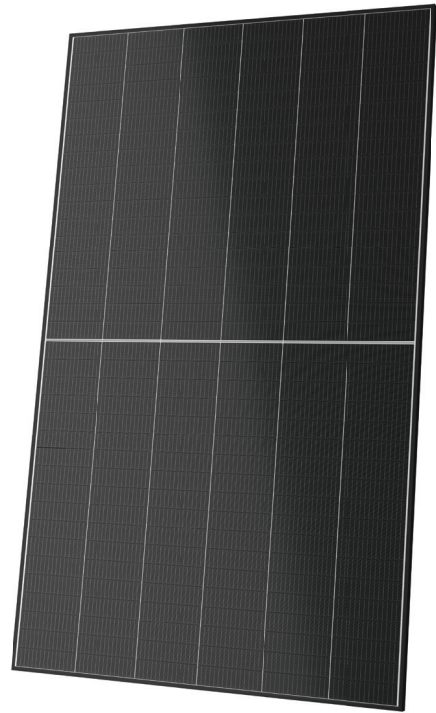

Higher Power on Front Side

Leading power class based on the enhanced N-type TOPCon platform, achieved through cutting-edge technology and an optimized layout that captures more sunlight.



Optimized Heat resistance

Optimized temperature coefficient achieved via advanced graphical patterning, busbar and multi-cell technology.



Proven Low Light Performance

Enhanced cell structure ensures superior module performance under low-light conditions.




Industry Leading Warranty

Advanced metallization and iterated module encapsulation deliver superior resistance to PID, LID / LeTID, and UV degradation.



Mechanical Load Enhanced

Certified to withstand:
5400 Pa front side max static test load
2400 Pa rear side max static test load

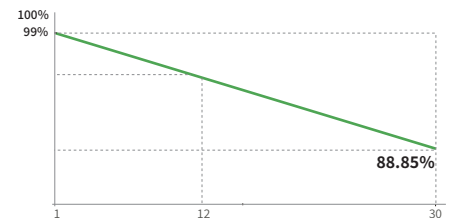

15 Year Product Warranty | **30 Year** Linear Power Warranty | **1%** First-year Degradation | **0.35%** Annual Degradation Over 30 Years

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



POSITIVE QUALITY™
Continuous Quality Assurance

JKM530-550N-54QL6-DV-Pre1-E1-EU

54QL6-DV 530-550 Watt

Mechanical Characteristics

Cell Type	N- type Mono-crystalline
No. of cells	216 (54×4)
Dimensions	1980×1134×30 mm
Weight	28.0 kg
Front Glass	2.0 mm, Anti-reflection Coating
Back Glass	2.0 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	JK03M/JK03M2/Others*
Output Cables (Including Connector)	≥4.0 mm ² (+): 600 mm , (-): 400 mm or Customized Length

* MC4-EVO2 available upon request and subject to availability

Packaging Configuration

Pallet Dimensions	1990×1140×1249 mm
Packing Detail (Two pallets = One stack)	36 pcs/pallets, 72 pcs/stack, 864 pcs/ 40'HQ Container

Specifications (STC)

Maximum Power - P _{max} [Wp]*	530	535	540	545	550
Maximum Power Voltage - V _{mp} [V]	34.53	34.71	34.90	35.08	35.26
Maximum Power Current - I _{mp} [A]	15.35	15.41	15.47	15.54	15.60
Open-circuit Voltage - V _{oc} [V]	40.43	40.63	40.83	41.03	41.23
Short-circuit Current - I _{sc} [A]	16.01	16.05	16.09	16.13	16.17
Module Efficiency STC [%]	23.60	23.83	24.05	24.27	24.50
Power Sorting	0 ~ + 3 %				
Temperature Coefficient of P _{max}	-0.26 %/°C				
Temperature Coefficient of V _{oc}	-0.24 %/°C				
Temperature Coefficient of I _{sc}	0.046 %/°C				


STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5. *Power measurement tolerance: ±3%.

Application Conditions

Level T ₉₈ ≤ 70 °C	- 40 °C to + 70 °C*
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	35 A

*Short-term up to 85°C; higher operation requires IEC TS 63126 testing

Engineering Drawings

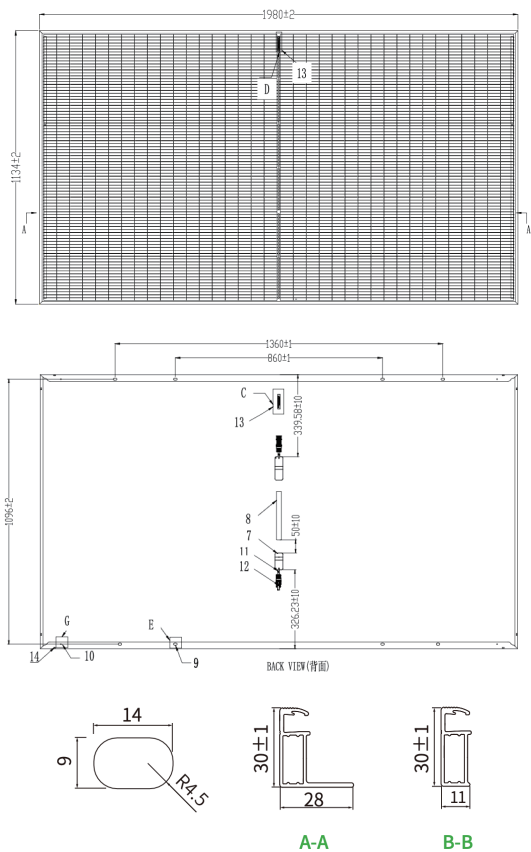

*Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

